


PE-65535NL




NOTICE: THE INFORMATION AND DESIGN CONTAINED HEREIN IS THE PROPERTY OF PULSE WHO RESERVES ALL RIGHTS THERETO.

TEST NOTES:

1. TURNS RATIO 1 V 10 KHz (100%) .  
 $\frac{(4-5)}{(1-3)} = \frac{(5-6)}{(1-3)} = 1.0 \pm 2\%$
2. INDUCTANCE 20 KHz 0.02 V (100%)  
 (1-3) = 20 mH MIN
3. LEAKAGE INDUCTANCE 100 KHz 0.02 V (SAMPLE)  
 (4-6) WITH (1-3) SHORT = 5.0 uH MAX
4. COUPLING CAPACITY 100 KHz 0.02 V (SAMPLE)  
 (4-6) TO (1-3) = 130 pF MAX
5. DC RESISTANCE (SAMPLE)  
 (1-3) = 2.65 OHM MAX  
 (4-6) = 5.00 OHM MAX
6. HIPOT (100%)  
 (1-3) TO (4-6) = 1500 VRMS 1 MINUTE  
 (1650 VRMS 6 SEC)



SCHEMATIC

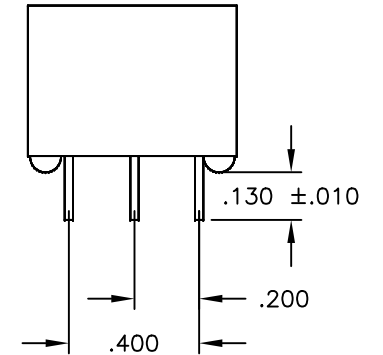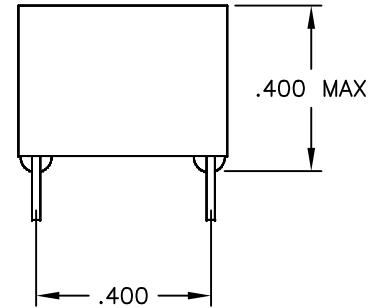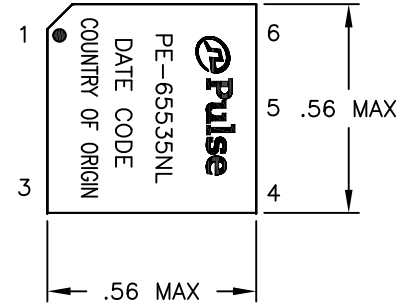

FINAL OUTLINE

FIG.3

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES TOLERANCES ARE:  
 DECIMALS .XX ±.01 .XXX ±.005  
 ANGLES ± 1°  
 DO NOT SCALE DRAWING

SIZE	CAGE CODE	DWG. NO.	REV
B01961		PE-65535NL	12
SCALE	CADD FILE	SHEET	
NONE		4 OF 4	