


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D6		REVISED PER ECR-19-017851	26NOV19	SM	DZ
		E			17DEC20	MG	DZ

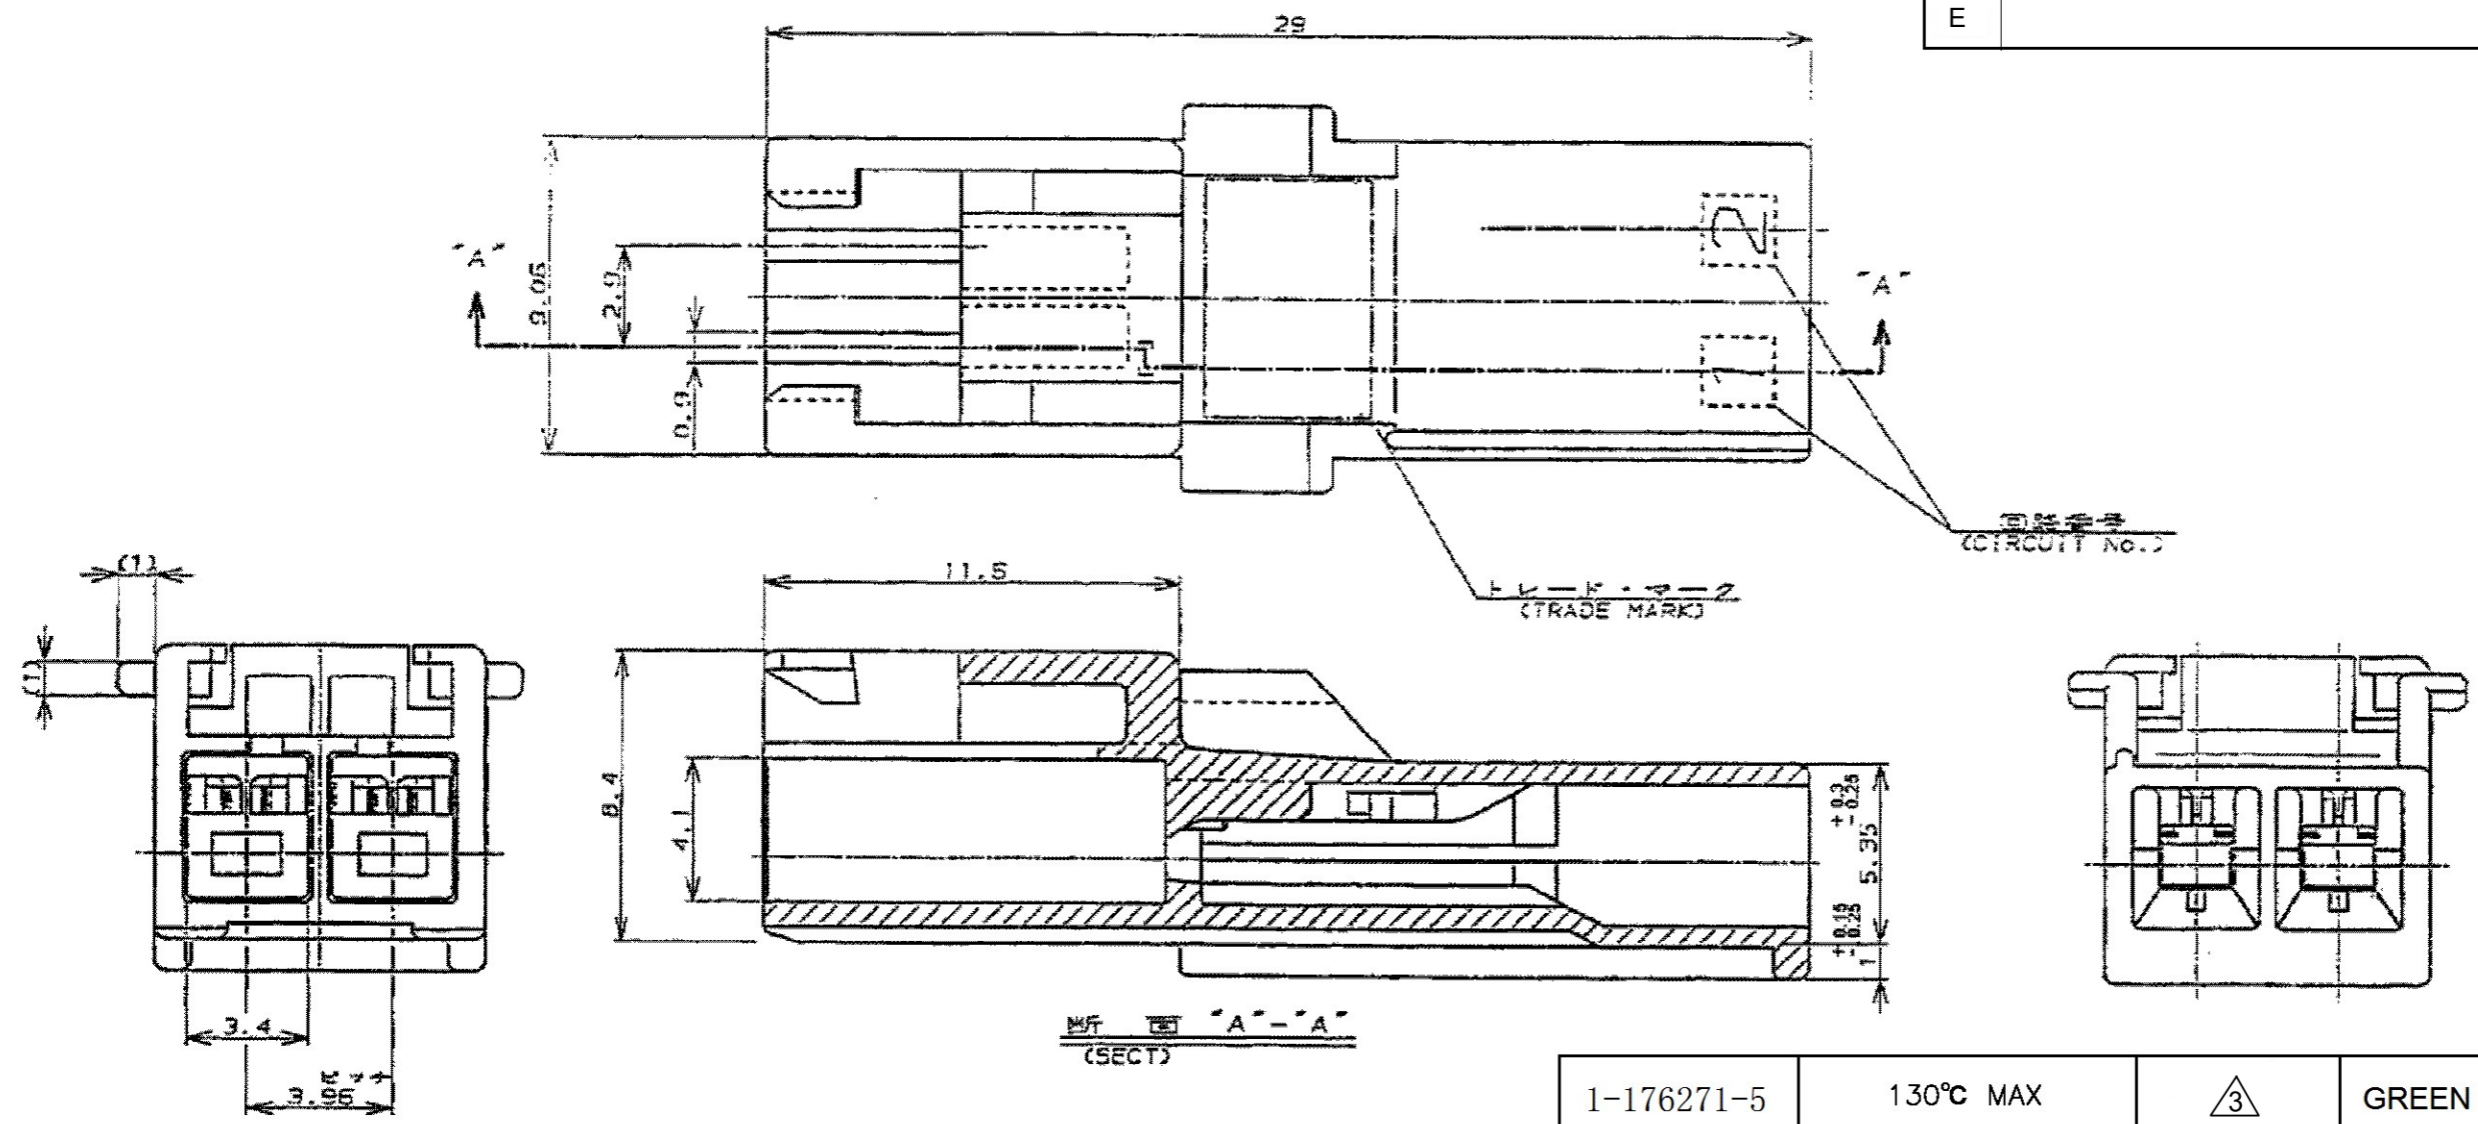

1. APPLICABLE CONTACT PART NUMBER;  
 TAB CONTACT: 175150-□ (#20-#16AWG)  
 175149-□ (#26-#22AWG)
- △2 TO BE USED WITH THE CONTACT WHICH IS RATED 105°C MAX
- △3 MATERIAL: PA66, UL94 V-0, GWIT 775°C

1-176271-5	130°C MAX	△3	GREEN 绿	2	1-176282-5
1-176271-1	130°C MAX	△3	NATURAL 自然色		1-176282-1 △2
176271-□	105°C MAX	PA66	BLACK 黒	2	176282-9
			BLUE 青		176282-6
			YELLOW 黄		176282-4
			RED 赤		176282-2
	NATURAL 自然色			176282-1	
MATING CONN. PART NUMBER 嵌合相手型番	TEMPERATURE RATING 定格温度	TYPE 種類	HOUSING COLOR 色	Pos. 極数	PART NUMBER 型番

1. 適用端子型番;  
 リセコンタクト: 175150-□ (#20-#16AWG)  
 175149-□ (#26-#22AWG)
- △2 適用コンタクトの使用温度は最大105°C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN Y.NARISAWA 19NOV1990	
CHK Y.FUJITA 19NOV1990	
APVD N.ONOUE 20NOV1990	
PRODUCT SPEC	
108-5302	NAME
APPLICATION SPEC	AMP UNIVERSAL POWER CONN. 3.96mm PITCH CAP HOUSING 2 Pos. (SGL ROW) AMP ユニバーサルパワーコネクタ 2極 3.96mmピッチ キャップハウジング
114-5142	SIZE
WEIGHT	CAGE CODE
RESTRICTED CUSTOMER	DRAWING NO
	RESTRICTED TO
	SCALE NTS
	SHEET 1 OF 1
	REV E