



PCB LAYOUT



| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| ON              | (ON)   |
| 5-6             | 5-4    |

(ON)=MOMENTARY

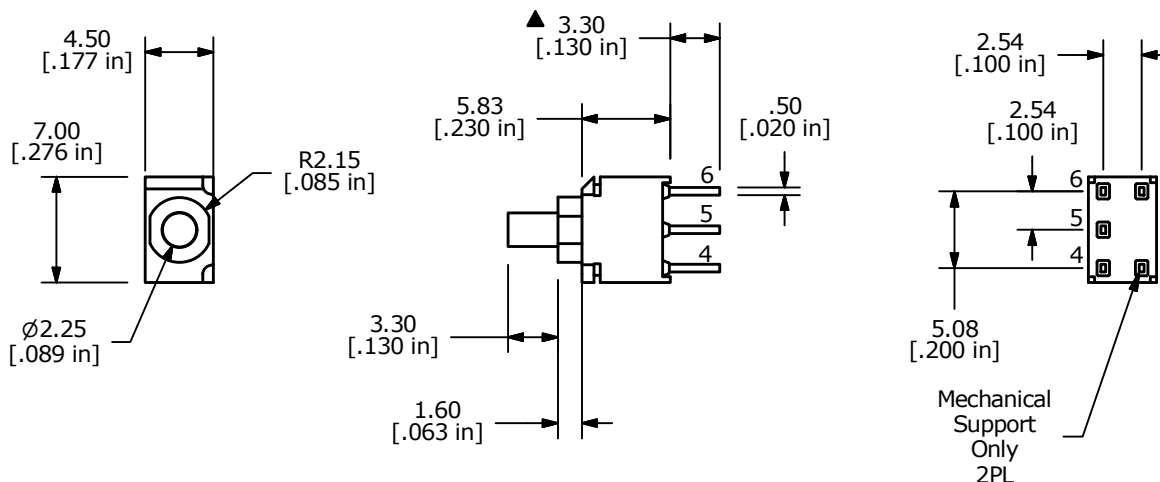

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
- ▲ 2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACTS: GOLD PLATED
5. TRAVEL: 1.0 mm
6. RATING: 0.4 VA max. @ 20V AC OR DC max.
7. CONTACT RESISTANCE: <100 MILLI-OHM
8. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES.
9. INSULATION RESISTANCE: 500 MEGA-OHM min.
10. DIELECTRIC STRENGTH: 500 V RMS @SEA LEVEL.
11. OPERATING TEMP.: -30°C to 85°C
12. ▲ DENOTES CRITICAL PARAMETER.
13. SEAL RATING: IP67
14. 2002/95/EC (ROHS) COMPLIANT



|     |        |                       |          |     |
|-----|--------|-----------------------|----------|-----|
| B   | 22253  | UPDATED DRAWING TITLE | 4/8/16   | MJR |
| A   | 21940  | New Release           | 8/3/2015 | rc  |
| REV | PCR NO | DESCRIPTION           | DATE     | BY  |

|                       |                |       |             |       |
|-----------------------|----------------|-------|-------------|-------|
| TITLE 800USP8P1A1M2RE |                |       |             |       |
| SCALE 4:1             | DATE 7/27/2015 | DR rc | DWG T850000 | REV B |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED