




2.0×1.6mm for Consumer Products

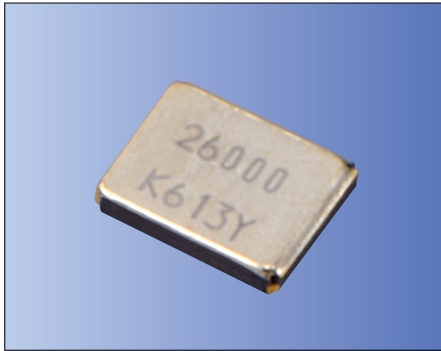

Features

- Crystal unit for Consumer Products
- Ultra-miniature and low profile (2.0×1.6×0.40mm)
- Ceramic package
- Reflow compatible

Applications

- Digital Electronics
- Consumer Products

How to Order

CX2016DB 27000 D0 G L L CC  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ①Series
- ②Frequency
- ③Load Capacitance      ④Frequency Tolerance
- ⑤Operating Temp. Range    ⑥Frequency Temp. Stability
- ⑦Individual Specification (STD Specification is "CC".)

<b>D0</b>	8 pF	<b>G</b>	$\pm 15 \times 10^{-6}$
<b>LL</b>	-30 to +85°C		$\pm 20 \times 10^{-6}$

Packaging (Tape & Reel 1000/ 3000/ 15000 pcs./ reel)

Specifications

Item	Symbol	Specification	Unit	Remarks
Frequency Range	f <sub>nom</sub>	16, 20, 24, 25, 26, 27, 30, 32, 37.4, 38.4, 40, 48, 50	MHz	Please contact us for other frequency range.
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other CL requirements.
Frequency Tolerance	f <sub>tol</sub>	±15	$\times 10^{-6}$	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	10μW(100μW max.)	μW	
Operating Temp. Range	T <sub>use</sub>	-30 to +85	°C	
Storage Temp. Range	T <sub>stg</sub>	-40 to +85	°C	
Frequency Temp. Characteristics	f <sub>tem</sub>	±20	$\times 10^{-6}$	Freq. deviation from the value at 25°C


Please contact us for other specifications.

Table 1 Motional Series Resistance Please contact us for other frequency range.

Frequency	Motional Series Resistance
16MHz	200 Ω max.
20MHz	150 Ω max.
32MHz	60 Ω max.
50MHz	50 Ω max.

Dimensions

(Unit: mm)

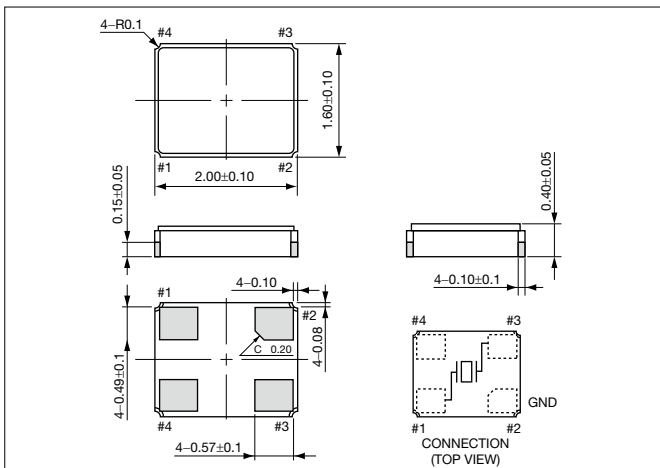

Recommended Land Pattern

(Unit: mm)

